

Fixed Mount Solutions

Accessory Guide

© 2022 Teledyne FLIR LLC All rights reserved. No parts of this material may be copied, translated, or transmitted (in any medium) without the prior written permission of Teledyne FLIR LLC.

Names and marks appearing on the products herein are either registered trademarks or trademarks of Teledyne FLIR LLC and/or its subsidiaries. All other trademarks, trade names, or company names referenced herein are used for identification only and are the property of their respective owners.

Protected by one or more patents and patent applications. Learn more here: www.flir.com/patentnotice.

Photographs and images appearing in this manual may have been modified for illustrative purposes using commercial image editing software and may not always reflect an actual product configuration. The contents of this document are subject to change without notice.

For additional information visit www.flir.com or write to:

Teledyne FLIR LLC
6769 Hollister Avenue
Goleta, CA 93117
USA

Support: <https://support.flir.com/>

Important Instructions and Notices to the User:

Modification of a Teledyne FLIR device without the express authorization of Teledyne FLIR LLC may void the user's authority under FCC rules to operate the device.

Document History

Revision	Date	Comment
100	September 2019	Initial Teledyne FLIR release
110	March 2020	Updated PoE injector information; updated discontinued accessories list
120	August 2020	Added cameras and accessories
130	November 2020	Updated cameras and accessories; updated PoE injector camera support
140	March 2021	Updated cameras and accessories
150	September 2021	Changed document title; updated devices and accessories
160	March 2022	Changed document title; updated devices, accessories, and discontinued accessories; added accessory information

Product Registration and Warranty Information

Register your Product with Teledyne FLIR at <https://customer.flir.com>.

For warranty information, see <https://www.teledyneflir.com/support-center/warranty/security/flir-security-product-warranties/>.

Table of Contents

1. Introduction	1
2. Quasar™ Visible Cameras	2
2.1 CB-640x Bullet Cameras	3
2.2 CF-6308-00-0 Fixed Box Camera	4
2.3 CM-6308 Panoramic Camera	6
2.4 CM-640x Mini-Dome Cameras	8
2.5 CP-6xxx PTZ Cameras	10
3. Ariel™ Visible Cameras	12
3.1 CB-33xx Bullet Cameras	13
3.2 CC-31xx Corner Camera	14
3.3 CM-33xx Mini-Dome Cameras	15
3.4 CM-3202 Mini-Dome Camera	17
4. F-, FH-, and PT-Series Thermal Cameras	20
4.1 F-Series Cameras	21
4.2 FH-Series Cameras	22
4.3 PT-Series Cameras	24
5. Elara™ Devices	25
5.1 DX-Series Cameras	26
5.2 FB-Series Cameras	28
5.3 FC-Series Cameras	29
5.4 FR-345-EST Camera	30
5.5 R-Series Radars	31
6. Saros™ Thermal Cameras	32
6.1 DH-390 Dome Camera	33
6.2 DM-Series Cameras	34
7. TRK-101 Analytics Encoder	36
8. Power Accessories	37
9. Discontinued Accessories	38

1 Introduction

This guide lists and describes the accessories available for FLIR Security fixed mount solutions. For example, you can use this guide to select mounting accessories for FLIR Security cameras.

For a list of discontinued accessories and their suggested replacements, see [Discontinued Accessories](#).

2 Quasar™ Visible Cameras


You can use this section to select accessories for the following Quasar visible cameras:

- [CB-640x Bullet Cameras](#)
- [CF-6308-00-0 Fixed Box Camera](#)
- [CM-6308 Panoramic Camera](#)
- [CM-640x Mini-Dome Cameras](#)
- [CP-6xxx PTZ Cameras](#)

2.1 CB-640x Bullet Cameras



The following accessories are available for Quasar CB-640x bullet cameras:


Part number / item code	Description and notes	Images (not to scale)
CM-CAPX-W32	Wall mount kit: <ul style="list-style-type: none"> • Adapts CB-640x bullet cameras for wall mounting applications • Includes wall bracket, conduit adapter, and pendant cap • Minimum wall thickness: 50mm (2") Dimensions 244 x 152 x 142 mm Color FLIR White Shipping box size 94 x 21 x 33 cm Shipping box weight 9 kg	
CX-POLE-G32	Pole mount adapter for CM-CAPX-W32 wall mount kit; includes straps Dimensions 240 x 180 x 60 mm Pole diameter range ø 130~152mm Color Cool Gray 2C Shipping box size 60 x 44 x 29 cm Shipping box weight 13 kg	

2.2 CF-6308-00-0 Fixed Box Camera



The following accessories are available for the Quasar CF-6308-00-0 Fixed Box camera:

Part number / item code	Description and notes	Images (not to scale)
<p>CF-ENCL-63E-I CF-ENCL-63E-0</p>	<p>Outdoor high-temperature, vandal-proof enclosure and wall mount bracket</p> <p>Quick specs CF-ENCL-63E-I model equipped with heater & IR LEDs</p> <p>Power (CF-ENCL-63E-I) 24VAC @18-23W</p> <p>Compliance IK10 / IP66</p> <p>Enclosure dimensions 174 (W) x 145 (H) x 422 (L) mm</p> <p>Color FLIR White</p> <p>Shipping box size 73 x 27 x 27 cm</p> <p>Shipping box weight</p> <p>CF-ENCL-63E-I 5.3 kg</p> <p>CF-ENCL-63E-0 5.1 kg</p> <p>Temperature range</p> <p>CF-ENCL-63E-I with IR LEDs on -20 to +50C/-4 to +122F</p> <p>CF-ENCL-63E-I with IR LEDs off -20 to +60C/-4 to +140F</p> <p>CF-ENCL-63E-0</p>	
<p>CX-POLE-G63</p>	<p>Pole mount adapter for CF-ENCL-63E-x; includes straps</p> <p>Dimensions 238 x 260 x 60 mm</p> <p>Pole diameter range ø 130-152 mm</p> <p>Color Cool gray 1C</p> <p>Shipping box size 64 x 42 x 33 cm</p> <p>Shipping box weight 13.8 kg</p>	 <p><i>With enclosure</i></p>

Part number / item code	Description and notes	Images (not to scale)
CF-ENCL-63	<p>Outdoor environmental housing</p> <p>Quick specs Equipped with Heater & Fan</p> <p>Power 24VAC @20W</p> <p>Housing Top: ABS & PC Bottom: Aluminum Sunshield: Aluminum</p> <p>Compliance IK10 / IP68</p> <p>Suitable camera size 108 (W) x 75 (H) x 300 (L) mm</p> <p>Dimensions including sunshield 161 (W) x 141 (H) x 360 (L) mm</p> <p>Temperature range -20 to +50C (-4 to +122F)</p> <p>Color White</p> <p>Shipping box size 58 x 38 x 48 cm</p> <p>Shipping box weight 17.3 kg</p>	 <p><i>Without sunshield</i></p> 
CF-POLE-63	<p>Pole mount adapter for CF-ENCL-63; includes straps</p> <p>Dimensions 152 (L) x 161 (W) x 73 (D) mm</p> <p>Pole diameter range ø 2.5-8.5"</p> <p>Color White</p> <p>Shipping box size 37.5 x 26.5 x 37.5 cm</p> <p>Shipping box weight 16.47 kg</p>	
CF-L308-11-I	<p>Ultra HD i-CS Lens (3.9-10mm)</p> <p>Shipping box size 49 x 36 x 33 cm</p> <p>Shipping box weight 10 kg</p>	
CF-L308-21-I	<p>Ultra HD i-CS Lens (9-50mm)</p> <p>Shipping box size 49 x 36 x 33 cm</p> <p>Shipping box weight 10 kg</p>	<p><i>Images not available</i></p>
CF-L304-21-P	<p>Quad HD (1440p) lens, 12-50mm, F1.5, 1/1.8", P-Iris, IR corrected, CS mount</p> <p>Shipping box size 66 x 38 x 39 cm</p> <p>Shipping box weight 20 kg</p>	

2.3 CM-6308 Panoramic Camera



The following accessories are available for the CM-6308 Panoramic camera:

Part number / item code	Description and notes	Images (not to scale)
CM-CAPX-63P	Pendant cap kit <ul style="list-style-type: none"> • Heavy-duty aluminum vandal mount • IP67 & IK10 ratings w/ 0.75" conduit • Ideal for indoor/outdoor & corrections applications 	 <p>CM-CAPX-63P</p>  <p>With camera</p>
CX-ARMX-G3	Wall mount bracket (1.5" PF threaded) <p>Dimensions 250 (L) x 140 (W) x 228(H) mm</p> <p>Color White</p> <p>Shipping box size 31 x 77 x 48 cm</p> <p>Shipping box weight 13.65 kg</p>	
CX-CRNR-G3	90-degree angle exterior corner adapter for CX-xxxx-G3 mounts <p>Dimensions 400 (L) x 242 (D) x 200(H) mm</p> <p>Color White</p> <p>Shipping box size 45 x 40.5 x 42 cm</p> <p>Shipping box weight 29.01 kg</p>	
CX-POLE-G3	Pole adapter for CX-xxxx-G3 mounts, including straps for pole diameter \varnothing 2.5-8.5" <p>Dimensions 240 (L) x 161(W) x 72.5 (D) mm</p> <p>Color White</p> <p>Shipping box size 37 x 26.5 x 37.5 cm</p> <p>Shipping box weight 17.8 kg</p>	

Part number / item code	Description and notes	Images (not to scale)
CM-IMG5-63P	5th imager for CM-63xx-P1-I Dimensions 104.4 x 77.3 x 48.8 mm Color Black Shipping box size 55 x 31 x 50 cm Shipping box weight 12.25 kg	

2.4 CM-640x Mini-Dome Cameras



The following accessories are available for CM-640x Mini-Dome cameras:

Part number / item code	Description and notes	Images (not to scale)
CM-SECA-W4	Side conduit adapter kit for CM-640x mini-dome cameras: <ul style="list-style-type: none"> • Supplied with cable housing attached 	
CM-RCSD-G4	Recessed mount kit for CM-640x mini-dome cameras: <ul style="list-style-type: none"> • Supplied with ceiling sticker template and trim ring • Supports conduit connections 	 <p style="text-align: center;"><i>Mounted with camera</i></p>
421-0066-00 DH-CRNR-00	Corner mount kit	
421-0067-00 DH-POLE-00	Pole mount kit for pole diameter \varnothing 150-230mm (6.0-9.0")	
CM-SNSHLD-G4	Sun shield for CM-640x mini-dome cameras	


Part number / item code	Description and notes	Images (not to scale)
CM-CLEAR-64-11	Clear bubble for CM-640x mini-dome cameras	
CM-SMOKE-64-11	Smoked bubble for CM-640x mini-dome cameras	
421-0068-00	Pendant mount shroud kit	
421-0069-00	Pendant mount kit	

2.5 CP-6xxx PTZ Cameras

CP-6xxx-xx-I and -P models



The following accessories are available for Quasar CP-6xxx-xx-I and -P pendant cameras:

Part number / item code	Description and notes	Images (not to scale)
CX-GSNK-G32 CX-GSNK-G32-B	Gooseneck mount kit (1.5" PF inner threaded) Dimensions CX-GSNK-G32 \varnothing 113 x 838 (L) x 450 (W) mm CX-GSNK-G32-B 220 (L) x 125 (W) x 47.5 (H) mm Color White	
CX-DRP-G32-B	Ceiling mount kit (1.5" PF inner threaded) Dimensions \varnothing 165 x 257.5 mm Color White	
CX-PIPE-G325	50cm long extender pipe (1.5" PF outer & inner threaded) Dimensions \varnothing 54 X 520 mm Color White	<i>Image not available</i>
CX-ARMX-G3	Wall mount bracket (1.5" PF inner threaded) Dimensions 250 (L) x 140 (W) x 228(H) mm Color White Shipping box size 31 x 77 x 48 cm Shipping box weight 13.65 kg	
CX-ELBX-G3	Wall mount bracket (1.5" PF inner threaded) with IP68 electrical box enclosure Dimensions 316 (L) x 185 (W) x 228(H) mm Color White Shipping box size 45.5 x 32 x 47 cm Shipping box weight 13.4 kg	

Part number / item code	Description and notes	Images (not to scale)
CX-GSNK-G3	Gooseneck mount (1.5" PF inner threaded) with IP68 electrical box enclosure Dimensions 491 x 256 x 1084 mm Color White Shipping box size 90 x 57 x 20 cm Shipping box weight 14.55 kg	
CX-CRNR-G3	90-degree angle exterior corner adapter for CX-xxxx-G3 mounts Dimensions 400 (L) x 242 (D) x 200(H) mm Color White Shipping box size 45 x 40.5 x 42 cm Shipping box weight 29.01 kg	
CX-POLE-G3	Pole adapter for CX-xxxx-G3 mounts, including straps for pole diameter ø 2.5-8.5" Dimensions 240 (L) x 161(w) x 72.5 (D) mm Color White Shipping box size 37 x 26.5 x 37.5 cm Shipping box weight 17.8 kg	
CP-63CLEAR-P	Clear bubble for CP-6302-31-P	<i>Image not available</i>
CP-63SMOKE-P	Smoked bubble for CP-6302-31-P	<i>Image not available</i>

CP-6302-30-R model



The following accessories are available for the Quasar CP-6302-30-R recessed camera:

Part number / item code	Description
CP-63CLEAR-R	Clear bubble for CP-6302-30-R
CP-63SMOKE-R	Smoked bubble for CP-6302-30-R

Mounting accessories are not available for the CP-6302-30-R camera. For information about mounting the CP-6302-30-R camera, see the *Quasar Gen III Installation Manual*.

3 Ariel™ Visible Cameras


You can use this section to select accessories for the following Ariel visible cameras:

- [CB-33xx Bullet Cameras](#)
- [CC-31xx Corner Camera](#)
- [CM-33xx Mini-Dome Cameras](#)
- [CM-3202 Mini-Dome Camera](#)

3.1 CB-33xx Bullet Cameras



The following mounting accessories are available for CB-33xx bullet cameras:

Part number / item code	Description and notes	Images (not to scale)
CB-WLBX-31	Wall junction box: <ul style="list-style-type: none"> • IP66 wall mount with cable management box • Heavy-duty aluminum with 1/2" conduit connects Dimensions 47.5 x 120 mm Pole diameter range ø 2.5-8.5" Color FLIR White Shipping box size 66 x 29 x 18 cm Shipping box weight 6.5 kg	 <p style="text-align: center;">CB-WLBX-31</p>  <p style="text-align: center;">Mounted with camera</p>
CB-PLBX-31	Pole mount kit Includes pole mount and CB-WLBX-31 wall junction box Dimensions Pole bracket 240 x 180 x 60 mm Junction box 47.5 x 120 mm Pole diameter range ø 130-152 mm Color FLIR White Shipping box size 42 x x41 x 56 cm Shipping box weight 17 kg	
CB-4S-31	4S electrical box mounting adapter: <ul style="list-style-type: none"> • Adapts CB-33xx bullet cameras to standard 4S electrical box mounting • For indoors or weather-protected applications Dimensions 107 x 107 x 3 mm Color Silver Shipping box size 44 x 24 x 14 cm Shipping box weight 6.2 kg	

3.2 CC-31xx Corner Camera



The following accessories are available for the CC-31xx corner camera:

Part number / item code	Description and notes	Images (not to scale)
CC-BKBX-31	Corner camera conduit back box mounting kit: <ul style="list-style-type: none"> • Heavy-duty aluminum vandal mount • IK10 ratings w/ 0.75" conduit • Ideal for indoor/outdoor & corrections applications Dimensions 129.7 x 129.7 x 36 mm Color FLIR White Shipping box size 52 x 32 x 17 cm Shipping box weight 7.4 kg	 <p style="text-align: center;">CC-BKBX-31</p>  <p style="text-align: center;">With camera</p>
CC-COVR-31	Corner camera replacement cover Dimensions 185 x 180 x 32.3 mm Color FLIR White Shipping box size 49 x 40 x 25 cm Shipping box weight 11.5 kg	

3.3 CM-33xx Mini-Dome Cameras



The following accessories are available for CM-33xx mini-dome cameras:


Part number / item code	Description and notes	Images (not to scale)
CM-CAPX-31	Pendant cap bracket for indoor or outdoor applications Includes 1.5" male pipe threaded mount and 0.75" female EMT conduit compatibility	 <p style="text-align: center;">CM-CAPX-31</p> <p style="text-align: center;">With camera</p>
CX-ARMX-G3	Wall mount bracket (1.5" PF inner threaded) For a simple and easy wall mount solution, combine the 1.5" threaded CM-ARMX-G3 with the CM-CAPX-31. Sold separately. Dimensions 250 (L) x 140 (W) x 228(H) mm Color White Shipping box size 31 x 77 x 48 cm Shipping box weight 13.65 kg	
CX-POLE-G3	Pole adapter for CX-xxxx-G3 mounts, including straps for pole diameter \varnothing 2.5-8.5" For pole mounting, use these three accessories: <ul style="list-style-type: none"> • CX-POLE-G3 • CX-ARMX-G3 • CM-CAPX-31 Dimensions 240 (L) x 161 (W) x 72.5 (D) mm Color White Shipping box size 37 x 26.5 x 37.5 cm Shipping box weight 17.8 kg	

Part number / item code	Description and notes	Images (not to scale)
CM-RCSD-G2	Mini-dome recessed mounting kit: <ul style="list-style-type: none"> • Supplied with peel & stick template • Top mounted 4S Box attachment points (4S box not included) • Support conduit connections • Maximum surface thickness: 42mm (1.75") Color White Shipping box size 58 x 52 x 30 cm Shipping box weight 11.5 kg	 <p>With camera</p>
CM-BK BX-31	Mini-dome conduit back box: <ul style="list-style-type: none"> • Heavy-duty aluminum vandal mount • IP67 & IK10 ratings w/ 0.75" conduit • Ideal for indoor/outdoor & corrections applications Dimensions 147.9 x 147.9 x 58.2 mm Color FLIR White Shipping box size 38 x 34 x 20 cm Shipping box weight 9 kg	 <p>CM-BK BX-31</p>  <p>With camera</p>
CM-4S-31	4S electrical box mounting adapter: <ul style="list-style-type: none"> • Adapts CM-33xx mini-dome cameras to standard 4S electrical box mounting • For indoors or weather-protected applications Note: All CM-33xx cameras can directly mount to standard round electrical boxes without accessory parts. Dimensions 107 x 107 x 3 mm Color Silver Shipping box size 44 x 24 x 14 cm Shipping box weight 6.2 kg	
CM-CLEAR-31-11	Clear bubble for CM-33xx varifocal series Dimensions 139 x 139 x 39.7 mm Color FLIR White Shipping box size 83 x 35 x 19 cm Shipping box weight 6.2 kg	<p>Image not available</p>

3.4 CM-3202 Mini-Dome Camera



The following accessories are available for the CM-3202-11-I mini-dome camera:

Part number / item code	Description and notes	Images (not to scale)
CM-4S-32	Adapter plate for CM-3202 mini-dome camera: <ul style="list-style-type: none"> Adapts CM-3202 camera to <ul style="list-style-type: none"> Standard electrical box mounting Pendant, corner, and pole mounting using DH-series accessories For outdoor applications Dimensions 142 (D) x 5 (H) mm Color FLIR White Shipping box size 52 x 32 x 19 cm Shipping box weight 11 kg	
CM-RCSD-G2A	Recessed mount kit for CM-3202 mini-dome camera: <ul style="list-style-type: none"> Includes mounting template guide sticker, trim ring, and CM-4S-32 adapter plate Dimensions 223 (D) x 7.3 (H) mm Color FLIR White Shipping box size 58 x 52 x 30 cm Shipping box weight 11.5 kg	
421-0068-00 DH-PDST-00	Pendant mount shroud kit: <ul style="list-style-type: none"> Requires CM-4S-32 adapter plate 	
421-0069-00 DH-PDST-01	Pendant mount kit: <ul style="list-style-type: none"> Requires CM-4S-32 adapter plate 	

Part number / item code	Description and notes	Images (not to scale)
421-0066-00 DH-CRNR-00	Corner mount kit: <ul style="list-style-type: none"> Requires CM-4S-32 adapter plate and DH-PDST-01 pendant mount kit 	
421-0067-00 DH-POLE-00	Pole mount kit for pole diameter \varnothing 150-230mm (6.0-9.0"): <ul style="list-style-type: none"> Requires CM-4S-32 adapter plate and DH-PDST-01 pendant mount kit 	
CM-WLBX-42	Wall & surface mount kit with junction box for CM-3202 mini-dome camera: <ul style="list-style-type: none"> Heavy-duty aluminum mount Dimensions 147 (D) x 60 (H) mm Color FLIR White Shipping box size 88 x 36 x 17 cm Shipping box weight 11 kg	
CM-CAPX-W32	Wall mount kit: <ul style="list-style-type: none"> Adapts CM-3202 mini-dome camera for wall mounting applications Includes wall bracket, conduit adapter, and pendant cap Minimum wall thickness: 50mm (2") Dimensions 244 x 152 x 142 mm Color FLIR White Shipping box size 94 x 21 x 33 cm Shipping box weight 9 kg	 <p style="text-align: center;"><i>With camera</i></p>
CX-POLE-G32	Pole mount adapter for CM-CAPX-W32 wall mount kit; includes straps Dimensions 240 x 180 x 60 mm Pole diameter range \varnothing 130~152mm Color Cool Gray 2C Shipping box size 60 x 44 x 29 cm Shipping box weight 13 kg	

Part number / item code	Description and notes	Images (not to scale)	
CM-CADPT-W32	<p>CM-3202 mounting adapter kit for 1.5" threaded mounting hardware</p> <ul style="list-style-type: none"> Adapts CM-3202 camera to existing CM-3102 mini-dome camera mounting hardware Includes thread adapter, pendant cap, and mounting pad Adapts 1"-11 PT thread to 1.5"-11.5 PF thread Can use with CX-xxxx-G3 and -G32 1.5" PF inner threaded mounting hardware <p>Dimensions 150 (D) x 88.3 (H) mm Color FLIR White Shipping box size 177 x 165 x 101 mm Shipping box weight 800 g</p>	 <p>With camera</p>	
CM-CLEAR-32-11	<p>Clear bubble for CM-3202 mini-dome camera</p> <p>Dimensions 124 (D) x 99 (H) mm Color FLIR White</p>	 <p>CM-CLEAR-32-11</p>	 <p>CM-SMOKE-32-11</p>
CM-SMOKE-32-11	<p>Shipping box size 86 x 35 x 18 cm Shipping box weight 5.1 kg</p> <p>Smoked bubble for CM-3202 mini-dome camera</p>		

4 F-, FH-, and PT-Series Thermal Cameras

You can use this section to select accessories for the following thermal cameras:

- [F-Series Cameras](#)
- [FH-Series Cameras](#)
- [PT-Series Cameras](#)

4.1 F-Series Cameras



The following mounting accessories are available for F-Series cameras:

Part number / item code	Description and notes	Images (not to scale)
500-1116-00	Large pole adapter assembly for pole diameter \varnothing 150-230 mm (6-9")	
500-1119-00	Corner mount assembly	
500-1120-00	Pedestal mount assembly	
500-1121-00	Small pole adapter assembly for pole diameter \varnothing 65-110 mm (2.6-4.3")	
500-1123-00	Wall mount assembly for F-Series cameras	

4.2 FH-Series Cameras



The following mounting accessories are available for FH-Series cameras:

Part number / item code	Description and notes	Images (not to scale)
421-0086-00	Illuminator mount bracket for FH-Series cameras	<i>Image not available</i>
421-0087-00	Wall mount adapter for FH-Series cameras	
500-1116-00	Large pole adapter assembly for pole diameter \varnothing 150-230 mm (6-9")	
500-1119-00	Corner mount assembly	
500-1120-00	Pedestal mount assembly	
500-1121-00	Small pole adapter assembly for pole diameter \varnothing 65-110 mm (2.6-4.3")	

FH-Series cameras support the following Raytec IR LED illuminators, according to model / lens:

FH-Series model	Raytec products				Images (not to scale)
	Illuminator model	Angles	Lens model	Distances	
FH-369	VAR2-i6-1	120 x 50°	VAR-i6-LENS-12050 (Optional)	30m (98ft)	
FH-324		35 x 10°	Fitted as standard	100m (394ft)	
FH-669	VAR2-i6-2	60 x 25° per panel	Included	Narrow: 99m (325ft) at 60° Wide: 70m (230ft) at 120°	
FH-313	VAR2-i8-1	35 x 10°	Fitted as standard	165m (541ft)	
FH-625					
FH-644		60 x 25°	Included	95m (311ft)	
FH-612	VAR2-i8-2	10 x 10° per panel	Included	Narrow: 500m (1640ft) at 10° Wide: 354m (1161ft) at 20°	
FH-617	VAR2-i16-1	35 x 10°	Fitted as standard	250m (820ft)	
FH-610					
FH-608		10 x 10°	Included	500m (1640ft)	

4.3 PT-Series Cameras



The following mounting accessories are available for PT-Series cameras:

Part number / item code	Description and notes	Images (not to scale)
500-1110-00	Wall mount assembly (required for pole mount)	
500-1115-00	Small pole adapter assembly for pole diameter \varnothing 80-150mm (3.1-5.9")	
500-1116-00	Large pole adapter assembly	
500-1117-00	Pedestal mount assembly	
500-1118-00	Corner mount assembly	

5 Elara™ Devices

You can use this section to select accessories for the following Elara devices:


- [DX-Series Cameras](#)
- [FB-Series Cameras](#)
- [FC-Series Cameras](#)
- [FR-345-EST Camera](#)
- [R-Series Radars](#)

5.1 DX-Series Cameras



The following mounting accessories are available for Elara DX-Series PTZ cameras:

Part number / item code	Description and notes	Images (not to scale)
CX-GSNK-G32 CX-GSNK-G32-B	Gooseneck mount kit (1.5" PF inner threaded) Dimensions CX-GSNK-G32 \varnothing 113 x 838 (L) x 450 (W) mm CX-GSNK-G32-B 220 (L) x 125 (W) x 47.5 (H) mm Color White	
CX-DRP-G32-B	Ceiling mount kit (1.5" PF inner threaded) Dimensions \varnothing 165 x 257.5 mm Color White	
CX-PIPE-G325	50cm long extender pipe (1.5" PF outer & inner threaded) Dimensions \varnothing 54 X 520 mm Color White	<i>Image not available</i>
CX-ARMX-G3	Wall mount bracket (1.5" PF inner threaded) Dimensions 250 (L) x 140 (W) x 228(H) mm Color White Shipping box size 31 x 77 x 48 cm Shipping box weight 13.65 kg	
CX-ELBX-G3	Wall mount bracket (1.5" PF inner threaded) with IP68 electrical box enclosure Dimensions 316 (L) x 185 (W) x 228(H) mm Color White Shipping box size 45.5 x 32 x 47 cm Shipping box weight 13.4 kg	

Part number / item code	Description and notes	Images (not to scale)
CX-GSNK-G3	Gooseneck mount (1.5" PF inner threaded) with IP68 electrical box enclosure Dimensions 491 x 256 x 1084 mm Color White Shipping box size 90 x 57 x 20 cm Shipping box weight 14.55 kg	
CX-CRNR-G3	90-degree angle exterior corner adapter for CX-xxxx-G3 mounts Dimensions 400 (L) x 242 (D) x 200(H) mm Color White Shipping box size 45 x 40.5 x 42 cm Shipping box weight 29.01 kg	
CX-POLE-G3	Pole adapter for CX-xxxx-G3 mounts, including straps for pole diameter \varnothing 2.5-8.5" Dimensions 240 (L) x 161(w) x 72.5 (D) mm Color White Shipping box size 37 x 26.5 x 37.5 cm Shipping box weight 17.8 kg	

5.2 FB-Series Cameras



The following mounting accessories are available for Elara FB-Series cameras:

Part number / item code	Description and notes	Images (not to scale)
CB-WLBX-62	Wall junction box for FB-Series cameras: <ul style="list-style-type: none"> • IP66 wall mount with cable management box • Heavy-duty aluminum with 1/2" conduit connects 	
CB-PLBX-62	Pole mount kit for FB-Series cameras: <ul style="list-style-type: none"> • IP66 pole mount with cable management box • Heavy-duty aluminum with 1/2" conduit connects 	

5.3 FC-Series Cameras






The following accessories are available for Elara FC-Series cameras:

Part number / item code	Description and notes	Images (not to scale)
4129742	Wall mount assembly for FC-Series cameras	
4132982	Large pole adapter assembly for FC-Series; pole diameter \varnothing 75-180 mm (3-7")	
500-1120-00	Pedestal mount assembly	
500-1121-00	Small pole adapter assembly for pole diameter \varnothing 65-110 mm (2.6-4.3")	
421-0056-00	De-ice kit for 60 mm FC-Series lens	
421-0057-00	De-ice kit for 75 mm FC-Series lens	

5.4 FR-345-EST Camera



The following accessories are available for the Elara FR-345-EST camera:

Part number / item code	Description and notes	Images (not to scale)
CB-WLBX-G4	Wall & surface mount kit with junction box: <ul style="list-style-type: none"> • IP67 wall mount with cable management box • Heavy-duty aluminum with 1/2" conduit connects • Minimum surface thickness: 50 mm (2") Dimensions 320.3 x 147 mm Color FLIR White Shipping box size 88 x 36 x 17cm Shipping box weight 11 kg	 <p>CB-WLBX-G4</p> <p>With camera</p>
T300366	Skin temperature screening station backdrop & sticker kit: <ul style="list-style-type: none"> • Roll-up backdrop—1250 × 3000 mm / 49.2" × 118.1" • Stand • Flexible position floor sticker (T131180) • Queue marker floor stickers (T131179) • Five direction arrow floor stickers (T131178) 	
T131180	Skin temperature screening station flexible position floor stickers <ul style="list-style-type: none"> • 400 × 1200 mm / 15.8" × 47.2" 	
T131179	Set of five skin temperature screening station queue marker floor stickers <ul style="list-style-type: none"> • 400 mm (15.8") diameter 	
T131178	Set of five skin temperature screening station direction arrow floor stickers <ul style="list-style-type: none"> • 185 × 250 mm / 7.3" × 9.8" 	

5.5 R-Series Radars



The following mounting accessories are available for the Elara R-Series Radars:

Part number / item code	Description and notes	Images (not to scale)
421-0066-00	Corner mount kit	
421-0067-00	Pole mount kit for pole diameter \varnothing 150-230mm (6.0-9.0")	
421-0083-00	180° wall mount kit	

6 Saros™ Thermal Cameras

You can use this section to select accessories for the following Saros thermal cameras:

- [DH-390 Dome Camera](#)
- [DM-Series Cameras](#)

6.1 DH-390 Dome Camera



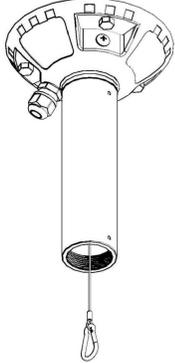
The following mounting accessories are available for the Saros DH-390 Dome camera:

Part number / item code	Description and notes	Images (not to scale)
421-0066-00 DH-CRNR-00	Corner mount kit	
421-0067-00 DH-POLE-00	Pole mount kit for pole diameter \varnothing 150-230mm (6.0-9.0")	
421-0068-00	Pendant mount shroud kit	
421-0069-00	Pendant mount kit	
421-0083-00	180° wall mount kit	

6.2 DM-Series Cameras



The following mounting accessories are available for Saros DM-Series PTZ cameras:

Part number / item code	Description and notes	Images (not to scale)
CX-GSNK-G32 CX-GSNK-G32-B	Gooseneck mount kit (1.5" PF inner threaded) Dimensions CX-GSNK-G32 \varnothing 113 x 838 (L) x 450 (W) mm CX-GSNK-G32-B 220 (L) x 125 (W) x 47.5 (H) mm Color White	
CX-DRP-G32-B	Ceiling mount (1.5" PF inner threaded) Dimensions \varnothing 165 x 257.5 mm Color White	
CX-PIPE-G325	50cm long extender pipe (1.5" PF outer & inner threaded) Dimensions \varnothing 54 X 520 mm Color White	<i>Image not available</i>
CX-ARMX-G3	Wall mount bracket (1.5" PF inner threaded) Dimensions 250 (L) x 140 (W) x 228(H) mm Color White Shipping box size 31 x 77 x 48 cm Shipping box weight 13.65 kg	

Part number / item code	Description and notes	Images (not to scale)
CX-ELBX-G3	Wall mount bracket (1.5" PF inner threaded) with IP68 electrical box enclosure Dimensions 316 (L) x 185 (W) x 228 (H) mm Color White Shipping box size 45.5 x 32 x 47 cm Shipping box weight 13.4 kg	
CX-GSNK-G3	Gooseneck mount (1.5" PF inner threaded) with IP68 electrical box enclosure Dimensions 491 x 256 x 1084 mm Color White Shipping box size 90 x 57 x 20 cm Shipping box weight 14.55 kg	
CX-CRNR-G3	90-degree angle exterior corner adapter for CX-xxxx-G3 mounts Dimensions 400 (L) x 242 (D) x 200 (H) mm Color White Shipping box size 45 x 40.5 x 42 cm Shipping box weight 29.01 kg	
CX-POLE-G3	Pole adapter for CX-xxxx-G3 mounts, including straps for pole diameter \varnothing 2.5-8.5" Dimensions 240 (L) x 161(w) x 72.5 (D) mm Color White Shipping box size 37 x 26.5 x 37.5 cm Shipping box weight 17.8 kg	

7 TRK-101 Analytics Encoder

The following accessory is available for the TRK-101 analytics encoder:

Part number / item code	Description and notes	Images (not to scale)
ACC-PNL-TRK101	10-unit rack mount kit	

8 Power Accessories

The following power accessories are available for FLIR Security cameras and other devices.

PoE Injectors

Part number / item code	Description and notes	Images (not to scale)
CP-POE-4P-60W-US Microsemi products: PD-9501GC/AC PD-9501GR/AC	<p>Inline 60W over 4 pairs Power over Ethernet (PoE) injectors</p> <ul style="list-style-type: none"> Support FLIR Security devices that can be powered by PoE: <ul style="list-style-type: none"> CP-POE-4P-60W-US / PD-9501GC/AC: IEEE 802.3bt-compliant PD-9501GR/AC: IEEE 802.3at-compliant Teledyne FLIR CP-POE-4P-60W-US is the Microsemi PD-9501GC/AC-US. Other Microsemi power cord options: -EU (Europe), -UK, -BR (Brazil), -AU (Australia), -JP (Japan) 100-240VAC input 	
4210755 FC-PWR-00	<p>Inline 30W IEEE 802.3at PoE injector</p> <ul style="list-style-type: none"> Supports FLIR Security cameras that can be powered by PoE IEEE 802.3at. Does not support: <ul style="list-style-type: none"> CP-6xxx DM-Series DX-Series FH-Series 100-240VAC input 	
T911183	<p>Gigabit 16W PoE IEEE 802.3af injector with multiple plugs</p> <ul style="list-style-type: none"> Supports R-Series 100-240VAC input 	

24VAC Power Supplies

Part number / item code(s)	Description and notes	Images (not to scale)
4124857	<p>UL-listed and -approved 24VAC power supply for F-Series, PT-Series, FH-Series, and PTZ cameras</p> <p>Ratings: NEMA 4X weather-resistant enclosure</p> <p>Input: 115VAC 60Hz @ 3A, or 230VAC 50Hz @ 1.5A</p> <p>Output: 24VAC @ 12.5 Amps, or 28VAC @ 10 Amps</p> <p>Fuse rating: 10A/32V</p> <p>Safety: UL / CUL</p>	

9 Discontinued Accessories

The following accessories are no longer available:

Discontinued part / item	Suggested replacement(s)
CF-L304-11-P	Product end of life by supplier
CM-CLEAR-31-01	N/A - Accessory for end-of-life product
CF-L131-31	N/A - Accessory for end-of-life product
CX-PRWR-241	4124857 UL-listed and -approved 24VAC power supply
CF-L131-05-50	N/A - Accessory for end-of-life product
500-0463-00 pedestal mount	500-1120-00 pedestal mount



Teledyne FLIR
Security Solutions

Americas

27700 SW Parkway Ave.
Wilsonville, OR 97070
USA

6769 Hollister Ave
Goleta, CA 93117
USA

Support:

<https://support.flir.com/>

Document:
427-0000-00-00
Revision: 160
Date: March 2022